


QUICK-LINK™

EMERGENCY V-BELT SOLUTION

Drop-in replacement for classical section V-belts

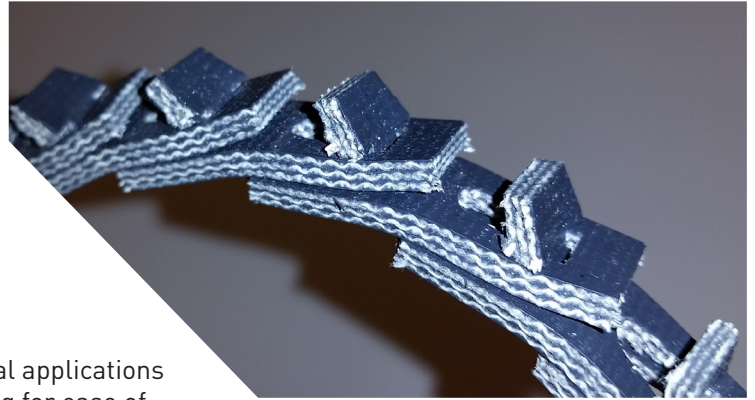

Markets/Applications

Suitable alternative to standard belts on all industrial applications and particularly suited to drives requiring link belting for ease of installation.

Features/Advantages

- Always have the right spare — make to any length by hand
- Highly resistant to oil, grease, water, chemicals, solvents, and temperatures from -40°F to +240°F (-40°C to +116°C)
- Install in minutes — even on captive drives
- Industry standard power ratings
- Available in standard classical cross sections

Recommended Sheaves: Multi-Duty Sheaves

NOTES:

Quick-Link is available in lengths noted below.

Quick-Link does not meet ARPM requirements for V-belt static conductivity.

WARNING: Do not use with back side idlers.

Product Number Series 7760

Part No.	Product No.	Top Width (in.)	Std. Box (ft.)	Weight (Lbs./ft.)
QL/0	7760-6107	3/8	25	0.05
QL/A	7760-6108	1/2	25	0.07
QL/B	7760-6109	21/32	25	0.10
QL/C	7760-6110	7/8	25	0.16

Part No.	Product No.	Top Width (in.)	Std. Sleeve (ft.)	Weight (Lbs./ft.)
QL/A-5	7760-6111	1/2	5	0.07
QL/B-6	7760-6112	21/32	6	0.10