


Falk™ Wrapflex® Elastomer Couplings | Talk About Simple! (English-Inch)

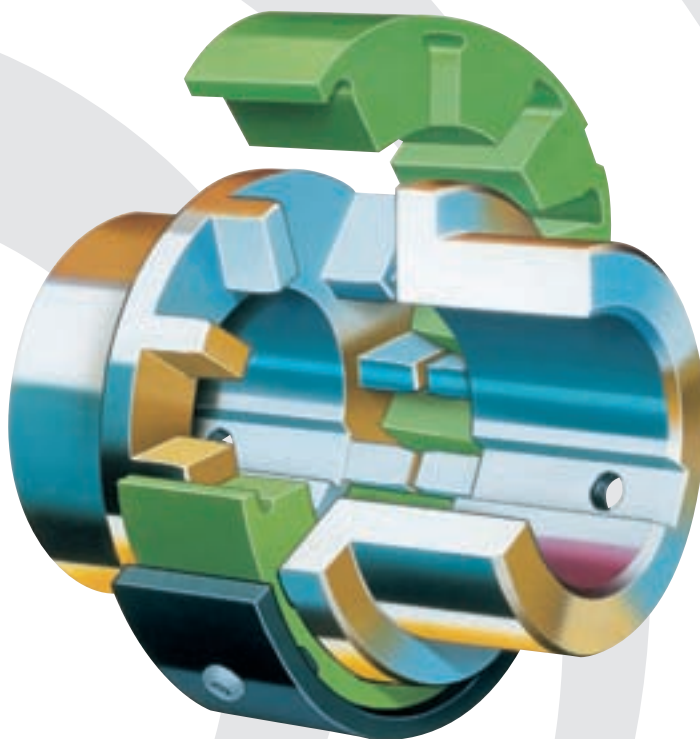

# Falk™ Wrapflex® Elastomer Couplings Now There's a Simple Way to Increase Productivity

- 12 sizes
- Torque Range: 133,000 lb.in. (15 028 Nm)
  - Bore Capacity: 7¼" (186 mm)
  - "Replace in Place"
  - Non-Lubricated/Low Maintenance

Ever think that keeping your production lines running more profitably could be as simple as replacing a light bulb or opening a can with a pop-top?

Quick, easy installation and replacement set new standards for reduced downtime. Because motors or drives don't need to be moved, our "replace in place" elements even eliminate the need for time-consuming realignment, further reducing downtime.

Available in close-coupled and spacer designs, Wrapflex couplings accommodate up to 7¼" (186 mm) shafts and torque loads up to 133,000 lb.in. (15 028 Nm).

For simplicity and cost-effectiveness over the life of your coupling, it just doesn't get any easier than this – Wrapflex couplings from Rexnord.


## Low Initial Cost

- Advanced manufacturing methods and innovative material allow us to offer you higher capacity ratings at a more competitive price than ever before possible.


## Easy to Install

- The compound root radius in the element teeth (patent #6,342,011) increases flexibility for easier and quicker assembly.
- Can be blind assembled from either direction.

*R10 Close-Coupled*

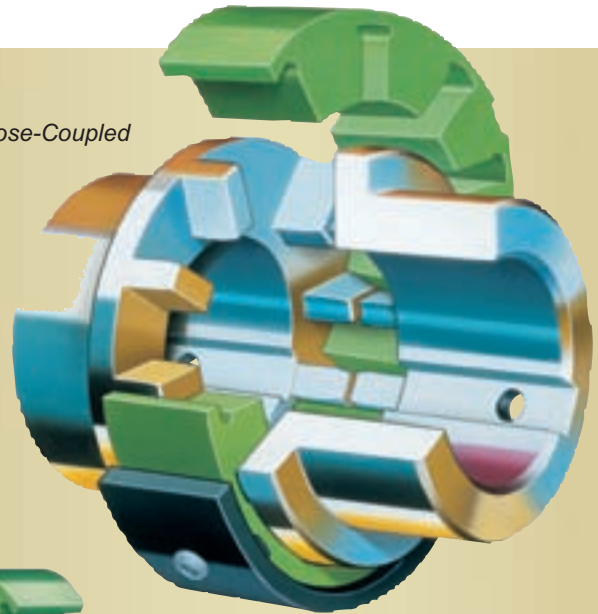

*R35 Half Spacer*

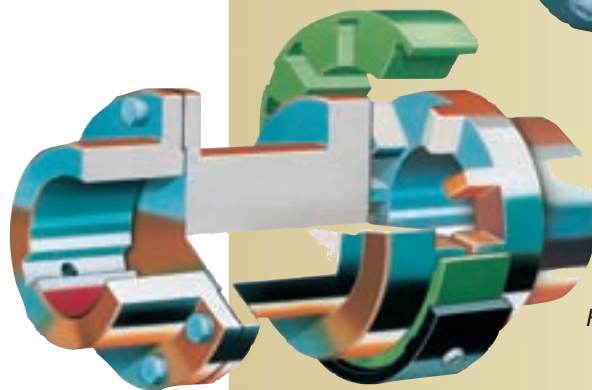



### Tough, Long-Lasting

- Polyurethane element has excellent wear and chemical resistance, and an operating temperature of -40° C (-40° F) to 95° C (200° F).
- Weather-resistant, high-grade nylon cover is standard.
- Optional carbon steel covers with black epoxy coating for highly corrosive, severe-duty applications. (Standard for sizes 60-80.)
- Optional Stainless steel hubs are available for Type R10 when required in the food industry or corrosive environments.

### Safety First

- Two stainless steel button-head capscrews, positioned 180° apart, prevent relative motion between cover and element and provide a positive means of retaining the cover to the element.
- Flexible element is retained after failure, helping minimize the potential for damage or personal injury.

### Quick and Easy Retrofits

- Compact design eliminates the need for coupling guard redesign on existing applications.
- Stock finished bores in popular sizes. Taper bores for Q.D. and TaperLock bushings are available off-the-shelf from our worldwide distribution network.

### Replace in Place

- Design allows quick and easy element replacement.
- There's no need to remove hubs or realign motors or drives, reducing downtime.


### No Maintenance Needed

- Non-lubricated design of the tough, flexible polyurethane element reduces periodic maintenance costs.


### Protects Equipment

- Compound root radius on inner corners of flex element (patent #6,342,011) act as a stress relief for longer element life.
- Hub teeth machined with special nose radius (patent #6,342,011) for better tooth-to-tooth contact (Sizes 5 to 80 only).
- Special hub feature to reduce reaction loads transferred to connected equipment (patent #6,648,763).

R31 Full Spacer

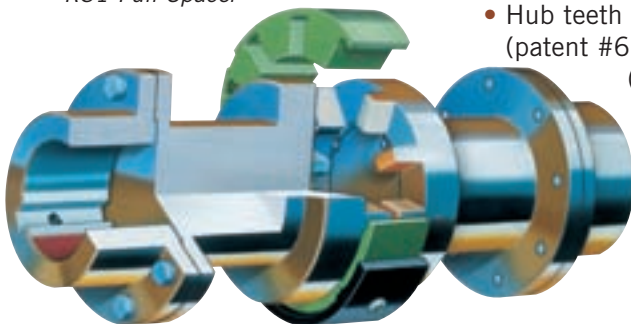

# Falk™ Wrapflex® Selection Guide

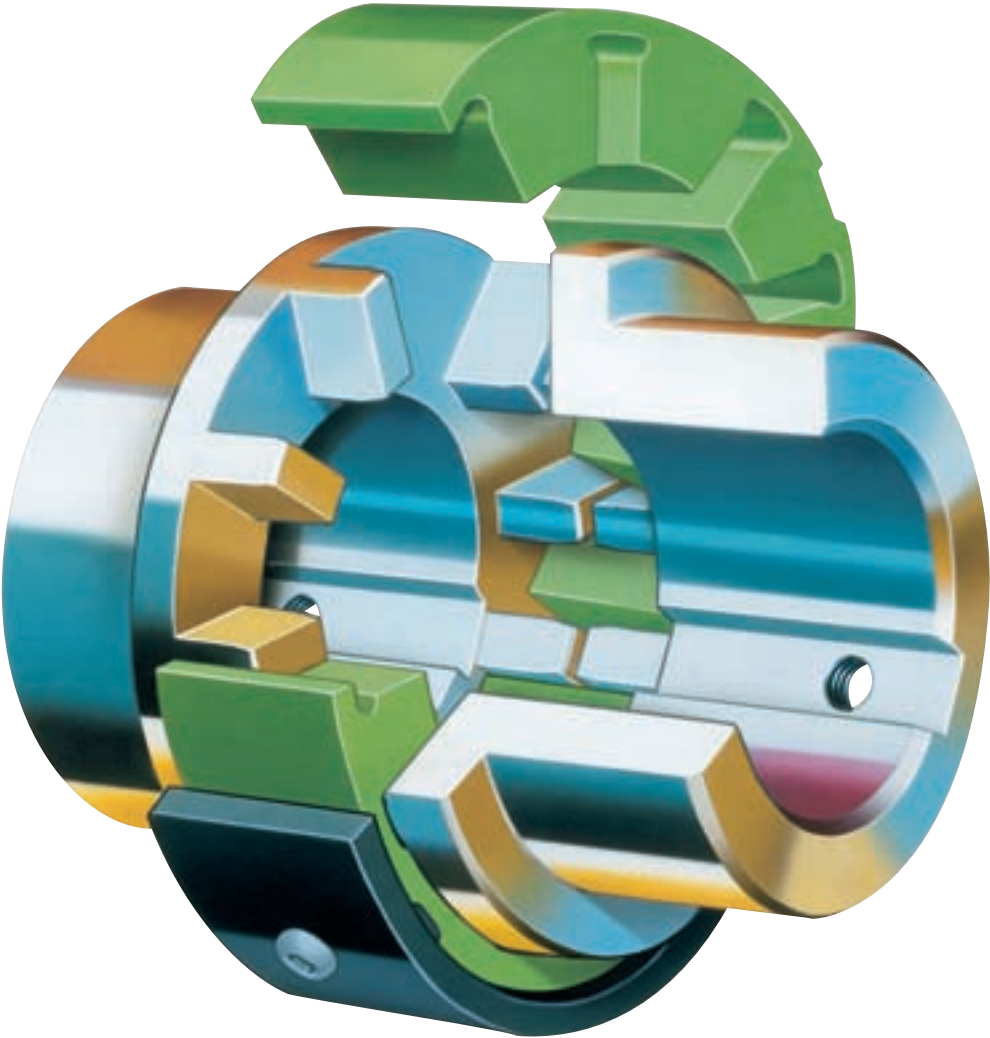







# Selection Guide 491-110, June 2007

## Wrapflex Quick Selection Method

1. Determine Service Factor — Refer to Table 1 or 4 for motor or turbine driven applications. See Table 5 for Engine Drives.
2. Determine Equivalent Horsepower:  
Refer to Table 2 — Under the actual hp required and opposite the service factor, read the equivalent hp.
3. Determine Coupling Size:
- A. Refer to Table 3 — Trace horizontally from the required speed to a hp value equal to or larger than the equivalent hp determined in Step 2. Read the coupling size at the top of the column.
- B. Check shaft diameters against coupling maximum bores shown in Table 3 and on Page 8 for the correct coupling size selected.
- C. In Table 3, check the required speed against the allowable speed shown below the correct coupling size selected.
4. Determine Coupling Dimensional Requirements:
- A. Determine application/design shaft spacing and check application dimension requirements against selected coupling type dimensions shown on Pages 8 thru 12. Confirm sufficient clearances for coupling.
5. Confirm that application ambient operating temperatures are between -40°C (-40°F) to 95°C (200°F). For applications requiring Service Factor above 1.5 and temperatures above 79°C (175°F), consult Rexnord Engineering for selection assistance or optional high temperature elements.

**SERVICE FACTORS** are a guide, based on experience, of the ratio between coupling catalog rating and system characteristics. The system characteristics are best measured with a torque meter.

**TABLE 1 — Service Factors**

Torque Demands Driven Machine	Typical applications for electric motor or turbine driven equipment	Typical Service Factor
	Constant torque such as Centrifugal Pumps, Blowers, and Compressors.	1.0
	Continuous duty with some torque variations including Plastic extruders, Forced Draft Fans.	1.5
	Light shock loads from Metal Extruders, Cooling Towers, Cane Knife, Log Haul.	2.0
	Moderate shock loading as expected from a Car Dumper, Stone Crusher, Vibrating Screen.	2.5
	Heavy shock load with some negative torques from Roughing Mills, Reciprocating Pumps, Compressors, Reversing Runout Tables.	3.0
	Applications like Reciprocating Compressors with frequent torque reversals, which do not necessarily cause reverse rotations.	Refer to Factory

**TABLE 2 — Equivalent Horsepower = (Actual hp x Service Factor)**

Service Factor ‡	Actual HP																									
	3/4	1	1½	2	3	5	7½	10	15	20	25	30	40	50	60	75	100	125	150	200	250	300	350	400	450	500
<b>1.0</b>	.75	1.0	1.5	2.0	3.0	5.0	7.5	10	15	20	25	30	40	50	60	75	100	125	150	200	250	300	350	400	450	500
<b>1.25</b>	.94	1.25	1.9	2.5	3.8	6.3	9.4	12.5	19	25	31	38	50	63	75	94	125	156	188	250	312	375	438	500	563	625
<b>1.5</b>	1.1	1.5	2.3	3.0	4.5	7.5	11.3	15	23	30	38	45	60	75	90	113	150	188	225	300	375	450	525	600	675	750
<b>1.75</b>	1.3	1.8	2.6	3.5	5.3	8.8	13.1	18	26	35	44	53	70	88	105	131	175	219	262	350	438	525	613	700	787	875
<b>2.0</b>	1.5	2.0	3.0	4.0	6.0	10.0	15.0	20	30	40	50	60	80	100	120	150	200	250	300	400	500	600	700	800	900	1000
<b>2.5</b>	1.9	2.5	3.8	5.0	7.5	12.5	18.8	25	38	50	63	75	100	125	150	187	250	312	375	500	625	750	875	1000	1125	1250
<b>3.0</b>	2.3	3.0	4.5	6.0	9.0	15.0	22.5	30	45	60	75	90	120	150	180	225	300	375	450	600	750	900	1050	1200	1350	1500
<b>3.5</b>	2.6	3.5	5.3	7.0	10.5	17.5	26.2	35	52	70	87	105	140	175	210	262	350	437	525	700	875	1050	1225	1400	1575	1750

‡ For service factors not listed, Equivalent hp = Actual hp x Service Factor.

© Rexnord Industries, LLC, 1998, 2007. All Rights Reserved. Litho in U.S.A.  
A-PLUS, CLUB GEAR HEAD, DRIVE ONE, FREEDOM, LIFELIGN, OMNIBOX, ORANGE PEEL,  
QUADRIVE, RAM, RENEW, REXNORD, SPEED QUOTE, SPEEDSELECT, STEELFLEX, TRUE HOLD,  
ULTRAMITE, ULTRAMAX, and WRAPFLEX are registered trademarks.  
Falk is a trademark of Rexnord. The contents of this bulletin are subject to change without notice or obligation. Information contained herein should be confirmed before placing orders.

**TABLE 3 — Falk “Wrapflex” Coupling Quick Selection Chart**

	2R	3R	4R	5R	10R	20R	30R	40R	50R	60R	70R	80R
<b>Max Bore (Inches)</b>	<b>0.875</b>	<b>1.125</b>	<b>1.375</b>	<b>1.625</b>	<b>1.875</b>	<b>2.375</b>	<b>2.875</b>	<b>3.375</b>	<b>4.125</b>	<b>5.250</b>	<b>6.125</b>	<b>7.250</b>
<b>Max Speed</b>	<b>4500 rpm</b>	<b>4500 rpm</b>	<b>4500 rpm</b>	<b>4500 rpm</b>	<b>4500 rpm</b>	<b>4500 rpm</b>	<b>4500 rpm</b>	<b>3600 rpm</b>	<b>3000 rpm</b>	<b>2500 rpm</b>	<b>2100 rpm</b>	<b>1800 rpm</b>
<b>Torque (lb-in)</b>	<b>100</b>	<b>300</b>	<b>500</b>	<b>550</b>	<b>1,150</b>	<b>2,800</b>	<b>4,600</b>	<b>9,100</b>	<b>22,200</b>	<b>35,500</b>	<b>70,900</b>	<b>133,000</b>
<b>HP/100 rpm</b>	<b>0.159</b>	<b>0.476</b>	<b>0.793</b>	<b>0.873</b>	<b>1.82</b>	<b>4.44</b>	<b>7.30</b>	<b>14.4</b>	<b>35.2</b>	<b>56.3</b>	<b>112</b>	<b>211</b>
<b>RPM</b>	<b>HP Ratings</b>											
<b>4500</b>	7.14	21.4	35.7	39.3	82.1	200	328					
<b>3600</b>	5.71	17.1	28.6	31.4	65.7	160	263					
<b>3000</b>	4.76	14.3	23.8	26.2	54.7	133	219	433	1057			
<b>2500</b>	3.97	11.9	19.8	21.8	45.6	111	182	361	881	1408		
<b>2100</b>	3.33	10.0	16.7	18.3	38.3	93.3	153	303	740		2362	
<b>1800</b>	2.86	8.57	14.3	15.7	32.8	80.0	131	260	634	1014	2025	3798
<b>1750</b>	2.78	8.33	13.9	15.3	31.9	77.7	128	253	616	986	1969	3693
<b>1450</b>	2.30	6.90	11.5	12.7	26.5	64.4	106	209	511	817	1631	3060
<b>1170</b>	1.86	5.57	9.28	10.2	21.3	52.0	85.4	169	412	659	1316	2469
<b>1000</b>	1.59	4.76	7.93	8.73	18.2	44.4	73.0	144	352	563	1125	2110
<b>870</b>	1.38	4.14	6.90	7.59	15.9	38.7	63.5	126	306	490	979	1836
<b>720</b>	1.14	3.43	5.71	6.28	13.1	32.0	52.6	104	254	406	810	1519
<b>650</b>	1.03	3.09	5.16	5.67	11.9	28.9	47.4	93.9	229	366	731	1372
<b>580</b>	0.920	2.76	4.60	5.06	10.6	25.8	42.3	83.7	204	327	652	1224
<b>520</b>	0.825	2.48	4.13	4.54	9.49	23.1	38.0	75.1	183	293	585	1097
<b>420</b>	0.666	2.00	3.33	3.67	7.66	18.7	30.7	60.6	148	237	472	886
<b>350</b>	0.555	1.67	2.78	3.05	6.39	15.5	25.5	50.5	123	197	394	739
<b>280</b>	0.444	1.33	2.22	2.44	5.11	12.4	20.4	40.4	98.6	158	315	591
<b>230</b>	0.365	1.09	1.82	2.01	4.20	10.2	16.8	33.2	81.0	130	259	485
<b>190</b>	0.301	0.904	1.51	1.66	3.47	8.44	13.9	27.4	66.9	107	214	401
<b>155</b>	0.246	0.738	1.23	1.35	2.83	6.89	11.3	22.4	54.6	87.3	174	327
<b>125</b>	0.198	0.595	0.992	1.09	2.28	5.55	9.12	18.0	44.0	70.4	141	264
<b>100</b>	0.159	0.476	0.793	0.873	1.82	4.44	7.30	14.4	35.2	56.3	112	211
<b>84</b>	0.133	0.400	0.666	0.733	1.53	3.73	6.13	12.1	29.6	47.3	94.5	177
<b>68</b>	0.108	0.324	0.539	0.593	1.24	3.02	4.96	9.82	24.0	38.3	76.5	143
<b>56</b>	0.089	0.267	0.444	0.489	1.02	2.49	4.09	8.09	19.7	31.5	63.0	118
<b>45</b>	0.071	0.214	0.357	0.393	0.821	2.00	3.28	6.50	15.9	25.3	50.6	95.0
<b>37</b>	0.059	0.176	0.294	0.323	0.675	1.64	2.70	5.34	13.0	20.8	41.6	78.1
<b>30</b>	0.048	0.143	0.238	0.262	0.547	1.33	2.19	4.33	10.6	16.9	33.7	63.3
<b>25</b>	0.040	0.119	0.198	0.218	0.456	1.11	1.82	3.61	8.81	14.1	28.1	52.8
<b>20</b>	0.032	0.095	0.159	0.175	0.365	0.889	1.46	2.89	7.04	11.3	22.5	42.2
<b>16.5</b>	0.026	0.079	0.131	0.144	0.301	0.733	1.20	2.38	5.81	9.29	18.6	34.8
<b>13.5</b>	0.021	0.064	0.107	0.118	0.246	0.600	0.985	1.95	4.76	7.60	15.2	28.5
<b>11</b>	0.017	0.052	0.087	0.096	0.201	0.489	0.803	1.59	3.87	6.20	12.4	23.2
<b>9</b>	0.014	0.043	0.071	0.079	0.164	0.400	0.657	1.30	3.17	5.07	10.1	19.0
<b>7.5</b>	0.012	0.036	0.060	0.065	0.137	0.333	0.547	1.08	2.64	4.22	8.44	15.8
<b>5</b>	0.0079	0.024	0.040	0.044	0.091	0.222	0.365	0.722	1.76	2.82	5.62	10.6

# Service Factors

## TABLE 4 — Flexible Coupling Service Factors for Motor ♦ and Turbine Drives

Service factors listed are typical values based on normal operation of the drive systems.

### Alphabetical listing of applications

<p><b>AERATOR</b> .....2.0</p> <p><b>AGITATORS</b> Vertical and Horizontal Screw, Propeller, Paddle .....1.0</p> <p><b>BARGE HAUL PULLER</b> .....1.5</p> <p><b>BLOWERS</b> Centrifugal .....1.0 Lobe or Vane .....1.25</p> <p><b>CAR DUMPERS</b> .....2.5</p> <p><b>CAR PULLERS</b> .....1.5</p> <p><b>CLARIFIER OR CLASSIFIER</b> .....1.0</p> <p><b>COMPRESSORS</b> Centrifugal .....1.0 Rotary, Lobe or Vane .....1.25 Rotary, Screw .....1.0 Reciprocating Direct Connected .....Refer to Factory Without Flywheel .....Refer to Factory *With Flywheel and Gear between Compressor and Prime Mover 1 cylinder, single acting .....3.0 1 cylinder, double acting .....3.0 2 cylinders, single acting .....3.0 2 cylinders, double acting .....3.0 3 cylinders, single acting .....3.0 3 cylinders, double acting .....2.0 4 or more cyl., single act. ....1.75 4 or more cyl., double act. ....1.75</p> <p>▲ <b>CONVEYORS</b> Apron, Assembly, Belt, Chain, Flight, Screw .....1.0 Bucket .....1.25 Live Roll, Shaker and Reciprocating .....3.0</p> <p>▲ <b>CRANES AND HOIST</b> Main Hoist .....1.75▲ Skip Hoist .....1.75▲ Slope .....1.5 Bridge, Travel or Trolley .....1.75</p> <p><b>DYNAMOMETER</b> .....1.0</p> <p><b>ELEVATORS</b> Bucket, Centrifugal Discharge .....1.25 Freight or Passenger .....Not Approved Gravity Discharge .....1.25</p> <p><b>ESCALATORS</b> .....Not Approved</p> <p><b>EXCITER, GENERATOR</b> .....1.0</p> <p><b>EXTRUDER, PLASTIC</b> .....1.5</p> <p><b>FANS</b> Centrifugal .....1.0 Cooling Tower .....2.0 Forced Draft — Across the Line start .....1.5 Forced Draft Motor Driven thru fluid or electric slip clutch .....1.0 Gas Recirculating .....1.5 Induced Draft with damper control or blade cleaner .....1.25 Induced Draft without controls .....2.0</p> <p><b>FEEDERS</b> Apron, Belt, Disc, Screw .....1.0 Reciprocating .....2.5</p> <p><b>GENERATORS</b> Even Load .....1.0 Hoist or Railway Service .....1.5 Welder Load .....2.0</p>	<p><b>HAMMERMILL</b> .....1.75</p> <p><b>LAUNDRY WASHER OR TUMBLER</b> .....2.0</p> <p><b>LINE SHAFTS</b> Any Processing Machinery .....1.5</p> <p><b>MACHINE TOOLS</b> Auxiliary and Traverse Drive .....1.0 Bending Roll, Notching Press, Punch Press, Planer, Plate Reversing .....1.75 Main Drive .....1.5</p> <p><b>MAN LIFTS</b> .....Not Approved</p> <p><b>METAL FORMING MACHINES</b> Continuous Caster .....1.75 Draw Bench Carriage and Main Drive .....2.0 Extruder .....2.0 Forming Machine and Forming Mills .....2.0 Slitters .....1.0 Wire Drawing or Flattening .....1.75 Wire Winder .....1.5 Coilers and Uncoilers .....1.5</p> <p><b>MIXERS</b> (see Agitators) Concrete .....1.75 Muller .....1.5</p> <p><b>PRESS, PRINTING</b> .....1.5</p> <p><b>PUG MILL</b> .....1.75</p> <p><b>PULVERIZERS</b> Hammermill and Hog .....1.75 Roller .....1.5</p> <p><b>PUMPS</b> Boiler Feed .....1.5 Centrifugal — Constant Speed .....1.0 Frequent Speed Changes under Load .....1.25 Descaling, with accumulators .....1.25 Gear, Rotary, or Vane .....1.25 Reciprocating, Plunger Piston 1 cyl., single or double act. ....3.0 2 cyl., single acting .....2.0 2 cyl., double acting .....1.75 3 or more cylinders .....1.5 Screw Pump, Progressing Cavity .....1.25 Vacuum Pump .....1.25</p> <p><b>SCREENS</b> Air Washing .....1.0 Grizzly .....2.0 Rotary Coal or Sand .....1.5 Vibrating .....2.5 Water .....1.0</p> <p><b>SKI TOWS &amp; LIFTS</b> .....Not Approved</p> <p><b>STEERING GEAR</b> .....1.0</p> <p><b>STOKER</b> .....1.0</p> <p><b>TIRE SHREDDER</b> .....1.50</p> <p><b>TUMBLING BARREL</b> .....1.75</p> <p><b>WINCH, MANEUVERING</b> Dredge, Marine .....1.5</p> <p><b>WINDLASS</b> .....1.5</p> <p><b>WOODWORKING MACHINERY</b> .....1.0</p> <p><b>WORK LIFT PLATFORMS</b> ..Not Approved</p>
--	---

- ♦ For engine drives, refer to Table 5. Electric motors, generators, engines, compressors and other machines fitted with sleeves or straight roller bearings usually require limited end float couplings. If in doubt, provide axial clearances and centering forces to the Factory for a recommendation.
- \* For balanced opposed design, refer to the Factory.
- ▲ If people are occasionally transported, refer to the Factory for the selection of the proper size coupling.
- ♣ For high peak load applications (such as Metal Rolling Mills) refer to the Factory.

## TABLE 5 — Engine Drive Service Factors ▼

Service Factors for engine drives are those required for applications where good flywheel regulation prevents torque fluctuations greater than ±20%. For drives where torque fluctuations are greater or where the operation is near a serious critical or torsional vibration, a mass elastic study is necessary.

No. of Cylinders	4 or 5 ▼					6 or more ▼				
	1.0	1.25	1.5	1.75	2.0	1.0	1.25	1.5	1.75	2.0
<b>Table 4 S.F.</b>	1.0	1.25	1.5	1.75	2.0	1.0	1.25	1.5	1.75	2.0
<b>Engine S.F.</b>	2.0	2.25	2.5	2.75	3.0	1.5	1.75	2.0	2.25	2.5


▼ To use Table 5, first determine application service factor from Table 4. Use that factor to determine ENGINE Service Factor from Table 5. When service factor from Table 4 is greater than 2.0, or where 1, 2, or 3 cylinder engines are involved, refer complete application details to Rexnord Engineering.

### Alphabetical listing of industries

<p><b>AGGREGATE PROCESSING, CEMENT, MINING KILNS; TUBE, ROD AND BALL MILLS</b> Direct or on L.S. shaft of Reducer, with final drive Machined Spur Gears .....2.0 Single Helical or Herringbone Gears .....1.75 Conveyors, Feeders, Screens, Elevators .....See General Listing Crushers, Ore or Stone .....2.5 Dryer, Rotary .....1.75 Grizzly .....2.0 Hammermill or Hog .....1.75 Tumbling Mill or Barrel .....1.75</p> <p><b>BREWING AND DISTILLING</b> Bottle and Can Filling Machines .....1.0 Brew Kettle .....1.0 Cookers, Continuous Duty .....1.25 Lauter Tub .....1.5 Mash Tub .....1.25 Scale Hopper, Frequent Peaks .....1.75</p> <p><b>CLAY WORKING INDUSTRY</b> Brick Press, Briquette Machine, Clay Working Machine, Pug Mill .....1.75</p> <p><b>DREDGES</b> Cable Reel .....1.75 Conveyors .....1.25 Cutter head, Jig Drive .....2.0 Maneuvering Winch .....1.5 Pumps (uniform load) .....1.5 Screen Drive, Stacker .....1.75 Utility Winch .....1.5</p> <p><b>FOOD INDUSTRY</b> Beet Slicer .....1.75 Bottling, Can Filling Machine .....1.0 Cereal Cooker .....1.25 Dough Mixer, Meat Grinder .....1.75</p> <p><b>LUMBER</b> Band Resaw .....1.5 Circular Resaw, Cut-off .....1.75 Edger, Head Rig, Hog .....2.0 Gang Saw (Reciprocating) .....Refer to Factory Log Haul .....2.0 Planer .....1.75 Rolls, Non-Reversing .....1.25 Rolls, Reversing .....2.0 Sawdust Conveyor .....1.25 Slab Conveyor .....1.75 Sorting Table .....1.5 Trimmer .....1.75</p> <p>♣ <b>METAL ROLLING MILLS</b> Coilers (Up or Down) Cold Mills only .....1.5 Coilers (Up or Down) Hot Mills only .....2.0 Coke Plants Pusher Ram Drive .....2.5 Door Opener .....2.0 Pusher or Larry Car Traction Drive .....3.0 Continuous Caster .....1.75 Cold Mills — Strip Mills .....Refer to Factory Temper Mills .....Refer to Factory Cooling Beds .....1.5 Drawbench .....2.0 Feed Rolls - Blooming Mills .....3.0 Furnace Pushers .....2.0 Hot and Cold Saws .....2.0 Hot Mills — Strip or Sheet Mills .....Refer to Factory Reversing Blooming .....Refer to Factory or Slabbing Mills .....Refer to Factory Edger Drives .....Refer to Factory Ingot Cars .....2.0 Manipulators .....3.0 Merchant Mills .....Refer to Factory Mill Tables Roughing Breakdown Mills .....3.0 Hot Bed or Transfer, non-reversing .....1.5 Runout, reversing .....3.0 Runout, non-reversing, non-plugging .....2.0 Reel Drives .....1.75 Rod Mills .....Refer to Factory Screwdown .....2.0 Seamless Tube Mills Piercer .....3.0 Thrust Block .....2.0 Tube Conveyor Rolls .....2.0 Reeler .....2.0 Kick Out .....2.0</p>	<p>Refer to Factory Shear, Croppers .....Refer to Factory Sideguards .....3.0 Skelp Mills .....Refer to Factory Slitters, Steel Mill only .....1.75 Soaking Pit Cover Drives — Lift .....1.0 Travel .....2.0 Straighteners (Billet Bundle Busters) .....2.0 Wire Drawing Machinery .....1.75</p> <p><b>OIL INDUSTRY</b> Chiller .....1.25 Oilwell Pumping (not over 150% peak torque) .....2.0 Paraffin Filter Press .....1.5 Rotary Kiln .....2.0</p> <p><b>PAPER MILLS</b> Barker Auxiliary, Hydraulic .....2.0 Barker, Mechanical .....2.0 Barking Drum L.S. shaft of reducer with final drive - Helical or Herringbone Gear .....2.0 Machined Spur Gear .....2.5 Cast Tooth Spur Gear .....3.0 Beater &amp; Pulper .....1.75 Bleachers, Coaters .....1.0 Calendar &amp; Super Calendar .....1.75 Chipper .....2.5 Converting Machine .....1.25 Couch .....1.75 Cutter, Felt Whipper .....2.0 Cylinder .....1.75 Dryer .....1.75 Felt Stretcher .....1.25 Fourdrinier .....1.75 Jordan .....2.0 Log Haul .....2.0 Line Shaft .....1.5 Press .....1.75 Pulp Grinder .....1.75 Reel, Rewinder, Winder .....1.5 Stock Chest, Washer, Thickener .....1.5 Stock Pumps, Centrifugal Constant Speed .....1.0 Frequent Speed Changes Under Load .....1.25 Suction Roll .....1.75 Vacuum Pumps .....1.25</p> <p><b>RUBBER INDUSTRY</b> Calendar .....2.0 Cracker, Plasticator .....2.5 Extruder .....1.75 Intensive or Banbury Mixer .....2.5 Mixing Mill, Refiner or Sheeter One or two in line .....2.5 Three or four in line .....2.0 Five or more in line .....1.75 Tire Building Machine .....2.5 Tire &amp; Tube Press Opener (Peak Torque) .....1.0 Tuber, Strainer, Pelletizer .....1.75 Warming Mill One or two Mills in line .....2.0 Three or more Mills in line .....1.75 Washer .....2.5</p> <p><b>SEWAGE DISPOSAL EQUIPMENT</b> Bar Screen, Chemical Feeders, Collectors, Dewatering Screen, Grit Collector .....1.0</p> <p><b>SUGAR INDUSTRY</b> Cane Carrier &amp; Leveler .....1.75 Cane Knife &amp; Crusher .....2.0 Mill Stands, Turbine Driver With all helical or Herringbone gears .....1.5 Electric Drive or Steam Engine Drive with Helical, Herringbone, or Spur Gears with any Prime Mover .....1.75</p> <p><b>TEXTILE INDUSTRY</b> Batcher .....1.25 Calendar, Card Machine .....1.5 Cloth Finishing Machine .....1.5 Dry Can, Loom .....1.5 Dyeing Machinery .....1.25 Knitting Machine .....Refer to Factory Mangle, Napper, Soaper .....1.25 Spinner, Tenter Frame, Winder .....1.5</p>
---	---

# Type R10

## Close Coupled Coupling/Dimensions — Inches

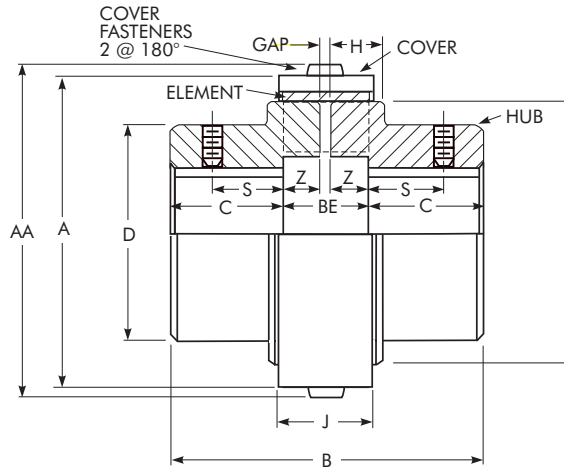

DIMENSIONS — INCHES

CPLG SIZE ★	Torque Rating lb-in	Allow Speed rpm	Max Bore †	Cplg Wt - lb ‡		A		AA		B	BE ■	C	D	F	H	J	S	Z	GAP ■	Cover Fasteners ♦	
				Nylon Cover	Steel Cover •	Nylon Cover	Steel Cover •	Nylon Cover	Steel Cover •											Size	Allen Wrench
2R	100	4500	.875	.804	.886	1.92	1.93	2.04	2.05	2.22	.65	.79	...	1.53	...	.55	.38	.30	.062	M3	M2
3R	300	4500	1.125	1.69	1.82	2.40	2.40	2.52	2.52	2.70	.73	.98	...	2.00	...	.63	.48	.33	.062	M3	M2
4R	500	4500	1.375	2.57	2.77	2.78	2.80	2.94	2.96	3.13	.77	1.18	...	2.28	...	.67	.58	.35	.062	M4	M2.5
5R	550	4500	1.625	2.96	3.27	3.01	3.01	3.17	3.17	2.83	.78	1.02	2.36	2.52	.59	.91	.63	.35	.078	M4	M2.5
10R	1,150	4500	1.875	5.48	5.98	3.56	3.56	3.72	3.72	3.62	.94	1.34	2.84	2.99	.75	1.10	.88	.43	.078	M4	M2.5
20R	2,800	4500	2.375	12.4	13.4	4.96	4.88	5.20	5.12	4.80	1.26	1.77	3.62	4.02	.98	1.46	1.00	.59	.078	M6	M4
30R	4,600	4500	2.875	20.7	22.1	5.77	5.63	6.01	5.87	5.98	1.42	2.28	4.13	4.65	1.14	1.65	1.25	.67	.078	M6	M4
40R	9,100	3600	3.375	37.6	39.8	7.17	6.97	7.48	7.28	7.13	1.85	2.64	5.12	5.91	1.34	2.15	1.63	.83	.188	M8	M5
50R	22,200	3000	4.125	78.8	82.9	9.09	8.82	9.41	9.13	8.46	2.39	3.03	7.01	7.48	1.81	2.74	1.75	1.10	.188	M8	M5
60R	35,500	2500	5.250	...	146	...	10.51	...	10.94	10.84	2.97	3.94	8.25	8.98	2.37	2.64	...	1.39	.188	M10	M6
70R	70,900	2100	6.125	...	244	...	12.20	...	12.64	12.76	3.31	4.72	9.88	10.63	2.74	2.95	...	1.56	.188	M10	M6
80R	133,000	1800	7.250	...	365	...	14.57	...	15.00	14.84	3.82	5.51	10.63	12.91	3.28	3.35	...	1.79	.250	M10	M6

★ Wrapflex is a metric product. Metric to inch conversions may not be direct. Dimensions are for reference only and are subject to change without notice unless certified.

† AGMA Class 1 clearance fit bores are standard for Sizes 2R thru 50R, with two setscrews (one over keyway & one at 90°). Interference fit bores and no setscrews are standard for Sizes 60R thru 80R. Long hubs and interference fits are available and recommended when at or near maximum bore and: a) Number of start/stop cycles exceeds 10 per hour; or b) Application service factor = 2.0 or higher.

‡ Coupling assembly weight is based on "no bore" hubs. For coupling assembly weight and bored hubs, subtract the following value for each hub:  $(0.20)(\text{Bore})^2(C)$  lb. Bore in "inches".

• Nylon cover is standard on Sizes 2R thru 50R, with an epoxy-coated steel cover as an option. Epoxy-coated steel cover is standard on Sizes 60R thru 80R, with no option for nylon cover.


■ "BE" = Standard "Distance Between Shaft Ends" with hubs mounted flush to the shaft ends. "GAP" = Minimum allowable "Distance Between Shaft Ends". Any shaft end spacing between the "GAP" and "BE" dimensions is acceptable. However, if utilizing a shaft end spacing less than the "BE" dimension, the key should not extend beyond the hub face in order to prevent potential interference with the flex element.

♦ Cover fasteners are stainless steel, socket button head capscrews, per ISO 7380-A2. Two capscrews per coupling assembly.



# Type R10

## QD Bushings/Dimensions — Inches

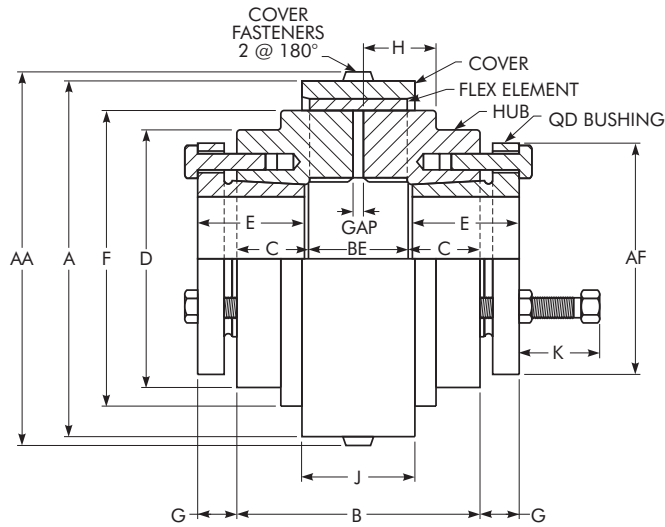

COUPLING SIZE	Bushing Size	Torque Rating ★ lb-in	HP per 100 rpm	Max RPM	Max Bore ★	Min Bore ★	Coupling Weight without Bushing		Gap	BE
							Nylon Cover – lb	Steel Cover – lb		
5R	JA	550	.87	4500	1.250	.500	2.13	2.43	.078	.78
10R	JA	1,150	1.82	4500	1.250	.500	3.49	3.99	.078	.94
20R	SD	2,800	4.44	4500	1.938	.500	6.73	7.78	.078	1.26
30R	SD	4,600	7.30	4500	1.938	.500	10.2	11.6	.078	1.42
40R	SF	9,100	14.4	3600	2.938	.500	17.0	19.2	.188	1.84
50R	E	22,200	35.2	3000	3.500	.875	38.6	42.7	.188	2.39
60R	J	35,500	56.3	2500	4.500	1.438	NA	86.3	.188	2.96
70R	J	70,900	112	2100	4.500	1.438	NA	142	.188	3.31
80R	M†	133,000	211	1800	5.500	1.938	NA	254	.250	3.82

COUPLING SIZE	Cover Fasteners •		Bushing Fasteners • Inch Hardware	AA – Nylon Cover	AA – Steel Cover	A – Nylon Cover	A – Steel Cover	AF ★	B
	Size	Hex Tool							
5R	M4	M2.5	#10-24 x 1.00	3.17	3.17	3.01	3.01	2.00	2.83
10R	M4	M2.5	#10-24 x 1.00	3.72	3.72	3.56	3.56	2.00	2.99
20R	M6	M4	1/4-20 x 1.00	5.20	5.12	4.96	4.88	3.19	3.78
30R	M6	M4	1/4-20 x 1.00	6.01	5.87	5.77	5.63	3.19	3.94
40R	M8	M5	3/8-16 x 1.25	7.48	7.28	7.17	6.97	4.63	4.52
50R	M8	M5	1/2-13 x 1.75	9.41	9.13	9.09	8.82	6.00	5.70
60R	M10	M6	5/8-11 x 2.50	...	10.94	...	10.51	7.25	9.34
70R	M10	M6	5/8-11 x 2.50	...	12.64	...	12.20	7.25	9.69
80R	M10	M6	3/4-10 x 3.00	...	15.00	...	14.57	9.13	14.22

COUPLING SIZE	C	D	E ★	F	G ★	H	J – Nylon Cover	J – Steel Cover	K – Clearance
5R	1.02	2.36	1.00	2.520	.44	.59	.91	.91	1.16
10R	1.02	2.84	1.00	2.992	.44	.75	1.10	1.10	1.16
20R	1.26	3.62	1.81	4.016	.56	.98	1.46	1.46	1.19
30R	1.26	4.13	1.81	4.646	.56	1.14	1.65	1.64	1.19
40R	1.34	5.12	2.00	5.906	.84	1.34	2.15	2.09	1.50
50R	1.65	7.01	2.63	7.480	1.13	1.81	2.74	2.65	2.13
60R	3.19	8.25	4.50	8.976	1.50	2.37	...	2.64	2.94
70R	3.19	9.88	4.50	10.630	1.50	2.74	...	2.95	2.94
80R	5.20	10.63	6.75	12.913	1.66	3.28	...	3.35	3.50


★ Typical – refer to bushing manufacturer for exceptions and Service Factor limitations.

† 80R requires a special "M" bushing, manufactured for "reverse" mounting. Consult bushing manufacturer.

• Cover Fasteners are ISO 7380, Stainless Steel, Socket Button Head Cap Screws. Bushing fasteners are SAE Grade 5 (inch) or ISO 8.8 (metric), Hex Head Cap Screws.

# Type R10

## Taper-Lock Bushings/Dimensions — Inches

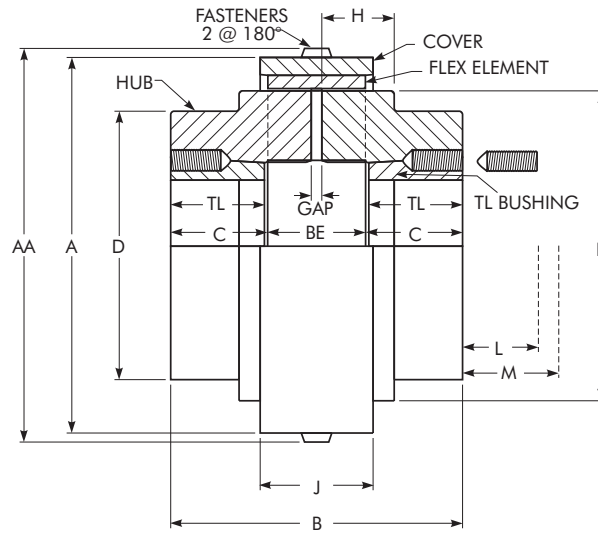

COUPLING SIZE	Bushing Size	Torque Rating ★ lb-in	HP Per 100 rpm	Max RPM	Max Bore ★	Min Bore ★	Coupling Weight w/o Bushing		Gap
							Nylon Cover	Steel Cover	
							lb	lb	
5R	1108	550	.87	4500	1.125	.500	1.78	2.08	.078
10R	1210	1,150	1.82	4500	1.250	.500	3.44	3.93	.078
20R	1610	2,800	4.44	4500	1.688	.500	6.86	7.91	.078
30R	2012	4,600	7.30	4500	2.125	.500	10.7	12.1	.078
40R	2517	9,100	14.4	3600	2.688	.500	19.4	21.7	.188
50R	3020	22,200	35.2	3000	3.250	.875	43.7	47.8	.188
60R	4040	35,500	56.3	2500	4.438	1.438	...	92.0	.188
70R	4545	70,900	112	2100	4.938	1.938	...	160	.188
80R	5050	126,000	200	1800	5.313	2.438	...	238	.250

COUPLING SIZE	BE	Cover Fasteners †		A – Nylon Cover	A – Steel Cover	AA – Nylon Cover	AA – Steel Cover	B	C
		Size	Hex Tool						
5R	.78	M4	M2.5	3.01	3.01	3.17	3.17	2.56	.89
10R	.94	M4	M2.5	3.56	3.56	3.72	3.72	3.54	1.30
20R	1.26	M6	M4	4.96	4.88	5.20	5.12	3.86	1.30
30R	1.42	M6	M4	5.77	5.63	6.01	5.87	4.72	1.65
40R	1.84	M8	M5	7.17	6.97	7.48	7.28	5.46	1.81
50R	2.39	M8	M5	9.09	8.82	9.41	9.13	6.72	2.17
60R	2.96	M10	M6	...	10.51	...	10.94	10.84	3.94
70R	3.31	M10	M6	...	12.20	...	12.64	12.37	4.53
80R	3.82	M10	M6	...	14.57	...	15.00	13.90	5.04

COUPLING SIZE	D	F	H	J - Nylon Cover	J - Steel Cover	L ‡		M •		TL
						Standard Hex Key	Short ■ Hex Key	Standard Hex Key	Short ■ Hex Key	
5R	2.36	2.520	.59	.91	.91	1.13	.63	1.25	.75	.875
10R	2.84	2.992	.75	1.10	1.10	1.38	.81	1.63	1.06	1.000
20R	3.62	4.016	.98	1.46	1.46	1.38	.81	1.63	1.06	1.000
30R	4.13	4.646	1.14	1.65	1.64	1.56	.94	2.00	1.38	1.250
40R	5.12	5.906	1.34	2.15	2.09	1.63	1.00	2.25	1.63	1.750
50R	7.01	7.480	1.81	2.74	2.65	1.81	1.19	2.69	2.06	2.000
60R	8.25	8.976	2.37	...	2.64	2.38	1.63	4.13	3.38	4.000
70R	9.88	10.630	2.74	...	2.95	2.63	1.94	4.75	4.06	4.500
80R	10.63	12.913	3.28	...	3.35	2.81	2.31	5.25	4.81	5.000

★ Typical – refer to bushing manufacturer for exceptions and Service Factor limitations.

† Cover Fasteners are ISO 7380, Stainless Steel, Socket Button Head Cap Screws.


‡ Space required to tighten bushing. Also, space required to loosen screws to permit removal of hub by puller.

• Space required to remove bushing using jackscrews – no puller required.

■ Standard hex key cut to minimum useable length.

# Type R31

## Full Spacer Coupling/Dimensions — Inches

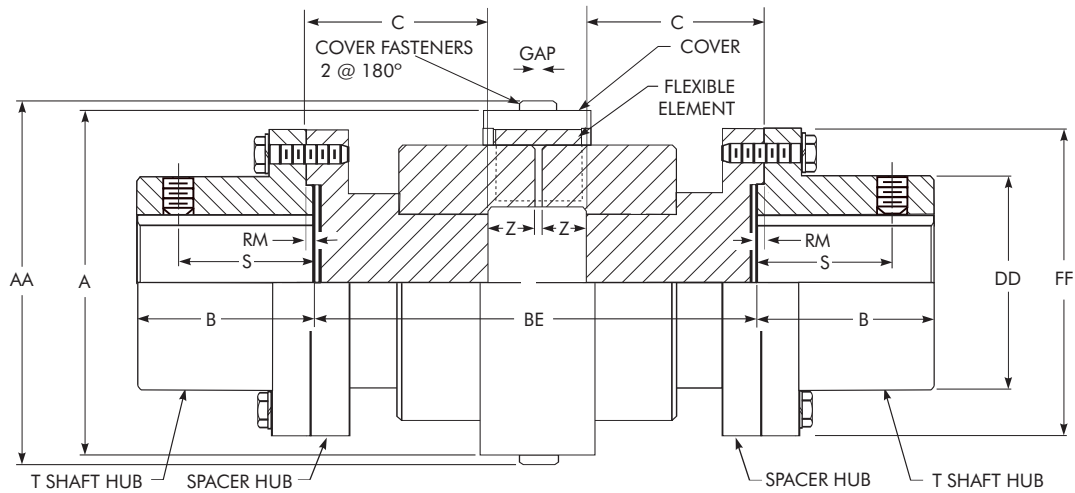

NOTE: Distance Between Shaft Ends (BE) = 2(C) + 2(Z) + Gap - 2(RM)  
SPACER DIMENSIONS — INCHES

SIZE ★	Torque Rating lb-in	Allow Speed rpm	Max Bore ♦	Cplg Wt No Bore — lb		BE		A		AA		B	DD	FF	RM	S	Z	Gap	Cover Fasteners •		Flange Fasteners ■		T Shaft Hub
				At Min lb	Per Added BE lb/in	Min	Max	Nylon Cover	Steel Cover †	Nylon Cover	Steel Cover †								Size	Allen Wrench Tool	Size	No. Per Flange	
				5R	550	4500	1.375	8.0	.79	3.19	9.25								3.01	3.01	3.17	3.17	
10R	1,150	4500	1.625	11.0	.86	3.50	10.00	3.56	3.56	3.72	3.72	1.63	2.34	3.70	.05	1.240	.43	.078	M4	M2.5	M6	8	1030T
20R	2,800	4500	2.125	21.0	1.49	3.50	10.00	4.96	4.88	5.20	5.12	2.13	3.09	4.45	.05	1.080	.59	.078	M6	M4	M6	8	1040T
30R	4,600	4500	2.375	31.0	1.88	4.38	10.00	5.77	5.63	6.01	5.87	2.38	3.44	4.96	.05	1.600	.67	.078	M6	M4	M8	8	1050T
40R	9,100	3600	3.125	57.0	2.23	5.00	12.25	7.17	6.97	7.48	7.28	3.13	4.31	6.02	.05	1.840	.83	.188	M8	M5	M10	12	1070T
50R	22,200	3000	3.500	100.0	3.31	6.50	12.25	9.09	8.82	9.41	9.13	3.50	4.81	7.01	.05	1.960	1.10	.188	M8	M5	M12	12	1080T
60R	35,500	2500	4.000	160.0	4.57	7.87	12.25	...	10.51	...	10.94	4.00	5.63	8.27	.05	...	1.39	.188	M10	M6	M16	12	1090T
70R	70,900	2100	4.750	225.0	6.59	8.80	14.70	...	12.20	...	12.64	3.56	6.75	9.88	.06	...	1.56	.188	M10	M6	M20	12	1100T
70R	70,900	2100	5.500	265.0	6.59	8.80	14.70	...	12.20	...	12.64	4.10	7.75	10.88	.06	...	1.56	.188	M10	M6	M20	12	1110T
80R	133,000	1800	6.250	415.0	8.10	9.85	16.69	...	14.57	...	15.00	4.70	8.88	12.56	.06	...	1.79	.250	M10	M6	M24	12	1120T
80R	133,000	1800	7.000	505.0	13.60	10.07	16.69	...	14.57	...	15.00	5.30	9.38	13.63	.06	...	1.79	.250	M10	M6	M27	12	1130T

★ Wrapflex is a metric product. Metric to inch conversions may not be direct. Dimensions are for reference only and are subject to change without notice unless certified.

† 5R-50R nylon cover is standard & epoxy coated steel cover is optional. 60R-80R epoxy coated steel cover is standard (nylon cover not available.)

• Cover Fasteners are ISO 7380 Stainless Steel Socket Button Head Cap Screws. Two cover fasteners per coupling.

■ Flange Fasteners are ISO Grade 10.9 hex head cap screws for 5R-50R and ISO Grade 8.8 hex head cap screws for 60R.

♦ Maximum Inch Bore listed is for a standard square key. Larger bores, with a rectangular key, are available. Sizes 5R-50R are standard clearance fit with setscrew over keyway. Size 60R is standard interference fit with keyway, but no setscrew. For interference fit with setscrew over keyway, refer to 427-105.

TABLE 6 — Taper-Lock® Bushings for T Shaft Hubs

CPLG SIZE	T Shaft Hub	Assembly Torque Rating lb-in	HP per 100 rpm	Allow Speed	Bore Range	Bushings Size
10R	1030T	1,150	1.82	4500	.500-1.125	1108
20R	1040T	2,800	4.44	4500	.500-1.375	1310
30R	1050T	4,300	6.82	4500	.500-1.625	1615
40R	1070T	9,100	14.4	3600	.750-2.500	2525
50R	1080T	11,300	17.9	3000	.750-2.500	2525
60R	1090T	24,000	38.1	2500	.938-3.000	3030
70R	1100T	24,000	38.1	2100	.938-3.000	3030
70R	1110T	44,000	71.1	2100	1.19-3.500	3535
80R	1120T	77,300	122	1800	1.44-4.000	4040
80R	1130T	110,000	174	1800	1.94-4.500	4545


TABLE 7 — Type R31 Standard Spacer Lengths — Inches

CPLG SIZE	BE Lengths (Distance Between Shaft Ends)					
	3.50	4.38	5.00	7.25	9.75	10.00
5R	X	X	X	...	...	...
10R	X	X	X	X	...	...
20R	X	X	X	X	...	...
30R	...	X	X	X	...	...
40R	...	...	X	X	X	...
50R	...	...	...	X	X	X
60R	...	...	...	...	X	...

Other BE lengths available. Refer to the Factory.

# Type R35

## Half Spacer Coupling/Dimensions — Inches

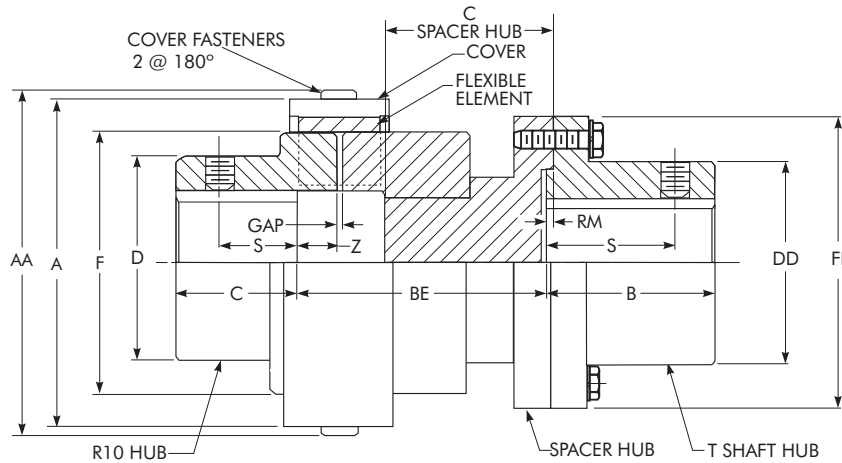

NOTE: Distance Between Shaft Ends (BE) = (C)<sub>Spacer Hub</sub> + 2(Z) + Gap - RM  
 SPACER DIMENSIONS — INCHES

SIZE ★	Torque Rating lb-in	Allow Speed rpm	Max Bore ♦		Cplg Wt No Bore - lb		BE		A		AA		B	C R10 Hub	D	DD	F	FF	RM	S		Z	Gap	Cover Fasteners ●		Flange Fasteners ■		T Shaft Hub
			T Shaft Hub	R10 Hub	At Min BE lb	Per Added BE lb/in	Min	Max	Nylon Cover	Steel Cover †	Nylon Cover	Steel Cover †								Shaft Hub *	R10 Hub *			Size	Allen Wrench Tool	Size	No. Per Flange	
5R	550	4500	1.375	1.625	5.61	.79	1.99	5.00	3.01	3.01	3.17	3.17	1.38	1.02	2.36	2.06	2.52	3.39	.05	1.08	.63	.35	.078	M4	M2.5	M6	4	1020T
10R	1,150	4500	1.625	1.875	8.73	.86	2.35	5.51	3.56	3.56	3.72	3.72	1.63	1.34	2.84	2.34	2.99	3.70	.05	1.24	.88	.43	.078	M4	M2.5	M6	8	1030T
20R	2,800	4500	2.125	2.375	18.6	1.49	3.01	5.51	4.96	4.88	5.20	5.12	2.13	1.77	3.62	3.09	4.02	4.45	.05	1.08	1.00	.59	.078	M6	M4	M6	8	1040T
30R	4,600	4500	2.375	2.875	28.4	1.88	3.45	5.75	5.77	5.63	6.01	5.87	2.38	2.28	4.13	3.44	4.65	4.96	.05	1.60	1.25	.67	.078	M6	M4	M8	8	1050T
40R	9,100	3600	3.125	3.375	49.4	2.23	3.49	7.25	7.17	6.97	7.48	7.28	3.13	2.64	5.12	4.31	5.91	6.02	.05	1.84	1.63	.83	.188	M8	M5	M10	12	1070T
50R	22,200	3000	3.500	4.125	90.0	3.31	4.45	7.25	9.09	8.82	9.41	9.13	3.50	3.03	7.01	4.81	7.48	7.01	.05	1.96	1.75	1.10	.188	M8	M5	M12	12	1080T
60R	35,550	2500	4.000	5.250	152	4.57	5.42	8.00	...	10.51	...	10.94	4.00	3.94	8.25	5.63	8.98	8.27	.05	...	...	1.39	.188	M10	M6	M16	12	1090T
70R	70,900	2100	4.750	6.125	234	6.55	6.06	9.01	...	12.20	...	12.64	3.56	4.72	9.88	6.75	10.63	9.88	.06	...	...	1.56	.197	M10	M6	M20	12	1100T
70R	70,900	2100	5.510	6.125	254	6.55	6.06	9.01	...	12.20	...	12.64	4.10	4.72	9.88	7.75	10.63	10.88	.06	...	...	1.56	.197	M10	M6	M20	12	1110T
80R	133,000	1800	6.250	7.250	390	8.04	6.80	10.22	...	14.57	...	15.00	4.70	5.51	10.63	8.88	12.91	12.56	.06	...	...	1.79	.236	M10	M6	M24	12	1120T
80R	133,000	1800	7.000	7.250	425	13.44	6.91	10.22	...	14.57	...	15.00	5.30	5.51	10.63	9.37	12.91	13.62	.06	...	...	1.79	.236	M10	M6	M27	12	1130T

- ★ IMPORTANT: Upon removal of spacer hub, working clearance available for equipment removal = "BE" - "Z".
- Wrapflex is a metric product. Metric to inch conversions may not be direct. Dimensions are for reference and are subject to change without notice unless certified.
- † 5R-50R nylon cover is standard & epoxy coated steel cover is optional. 60R-80R epoxy coated steel cover is standard (nylon cover not available).
- Cover Fasteners are ISO 7380 Stainless Steel Socket Button Head Cap Screws. Two cover fasteners per coupling.
- Flange Fasteners are ISO Grade 10.9 hex head cap screws for 5R-50R, and ISO Grade 8.8 hex head cap screws for 60R-80R.
- ♦ For R10 hubs see Page 8 for "Max Bore Protuded Shaft" along with the footnote. Maximum Inch Bore listed is for a standard square key. For T shaft hubs only, larger inch bores with a rectangular key are available. Sizes 5R-50R are standard clearance fit with setscrew(s) over keyway. Sizes 60R - 80R are standard interference fit with keyway, but no setscrew. For interference fit with setscrew over keyway, refer to 427-105. For R10 hubs at the Max Bore condition, limit the number of start/stop cycles to 10 per hour unless long hubs are used.
- \* Standard for T shaft hub is one setscrew over keyway; standard for R10 hub is two setscrews (one over keyway and one at 90° from keyway), Sizes 5-50R.

TABLE 8 — R35 Standard Spacer Lengths

Size	BE	Z	Usable Clearance Gap
5R	2.143	.35	1.793
	2.362	.35	2.012
	2.581	.35	2.231
	2.893	.35	2.543
	3.500	.35	3.150
10R	2.004	.43	1.574
	2.441	.43	2.011
	2.660	.43	2.230
	2.973	.43	2.543
	3.228	.43	2.798
	3.500	.43	3.070
	3.937	.43	3.507
4.098	.43	3.668	
20R	1.775	.59	1.185
	2.070	.59	1.480
	2.510	.59	1.920
	2.986	.59	2.396
	3.130	.59	2.540
	3.386	.59	2.796
	3.500	.59	2.910
	3.937	.59	3.347
	4.255	.59	3.665

TABLE 8 — R35 Standard Spacer Lengths

Size	BE	Z	Usable Clearance Gap
30R	2.332	.67	1.662
	2.952	.67	2.282
	3.464	.67	2.794
	4.333	.67	3.663
	5.000	.67	4.330
40R	3.425	.83	2.595
	3.681	.83	2.851
	4.468	.83	3.638
	4.550	.83	3.720
	5.000	.83	4.170
	5.800	.83	4.970
50R	4.745	1.10	3.645
	4.826	1.10	3.726
	6.076	1.10	4.976
60R	6.201	1.10	5.101
	6.359	1.39	4.969

Other BE lengths available. Refer to the Factory.  
 Taper-Lock bushing for R10 hub, see Page 10.  
 QD bushing for R10 hub, see Page 9.  
 Taper-Lock bushing for T shaft hub, see Table 6, Page 11.

# Engineering Data

**TABLE 9 — Recommended Bores for Steel Hubs — Inches**

Shaft Dia	Clearance Fit		Interference Fit		Shaft Dia	Clearance Fit		Interference Fit		Shaft Dia	Clearance Fit		Interference Fit		Shaft Dia	Interference Fit	
	Hub Bore	Clearance	Hub Bore	Interference		Hub Bore	Clearance	Hub Bore	Interference		Hub Bore	Clearance	Hub Bore	Interference		Hub Bore	Interference
+ .0000 - .0005	+ .0010 - .0000	.0000 .0015	+ .0005 - .0000	.0000 .0010	+ .0000 - .0010	+ .0015 - .0000	.0000 .0025	+ .0010 - .0000	.0000 .0020	+ .0000 - .0010	+ .0015 - .0000	.0000 .0025	+ .0015 - .0000	.0010 .0035	+ .0000 - .0010	+ .0015 - .0000	.0015 .0040
.5000	.5000		.4990		2.2500	2.2500		2.2480		4.0625	4.0625		4.0590		6.7500	6.7460	
.5625	.5625		.5615		3.3125	3.3125		3.3105		4.1250	4.1250		4.1215		7.0000	6.9960	
.6250	.6250		.6240		2.3750	2.3750		2.3730		4.1875	4.1875		4.1840				
.6875	.6875		.6865		2.4375	2.4375		2.4355		4.2500	4.2500		4.2465		+ .0000 - .0010	+ .0020 - .0000	.0020 .0050
.7500	.7500		.7490		2.5000	2.5000		2.4980		4.3125	4.3125		4.3090		7.2500	7.2450	
.8125	.8125		.8115		2.5625	2.5625		2.5605		4.3750	4.3750		4.3715		7.5000	7.4950	
.8750	.8750		.8740		2.6250	2.6250		2.6230		4.4375	4.4375		4.4340		7.7500	7.7450	
.9375	.9375		.9365		2.6875	2.6875		2.6855		4.5000	4.5000		4.4965		8.0000	7.9950	
1.0000	1.0000		.9990		2.7500	2.7500		2.7480		4.5625	4.5625		4.5590				
1.0625	1.0625		1.0615		2.8125	2.8125		2.8105		4.6250	4.6250		4.6215		8.2500	8.2445	.0025
1.1250	1.1250		1.1240		2.8750	2.8750		2.8730		4.6875	4.6875		4.6840		8.5000	8.4945	.0055
1.1875	1.1875		1.1865		2.9375	2.9375		2.9355		4.7500	4.7500		4.7465		8.7500	8.7445	
1.2500	1.2500		1.2490		3.0000	3.0000		2.9980		4.8125	4.8125		4.8090		9.0000	8.9945	
1.3125	1.3125		1.3115		+ .0000 - .0010	+ .0015 - .0000	.0000 .0025	+ .0010 - .0000	.0005 .0025	4.8750	4.8750		4.8715		9.2500	9.2440	.0030
1.3750	1.3750		1.3740							4.9375	4.9375		4.9340		9.5000	9.4940	.0060
1.4375	1.4375		1.4365		3.0625	3.0625		3.0600		5.0000	5.0000		4.9965		9.7500	9.7440	
1.5000	1.5000		1.4990		3.1250	3.1250		3.1225		5.0625	5.0625		5.0585	.0015	10.0000	9.9940	
+ .0000 - .0010	+ .0010 - .0000	.0000 .0020	+ .0005 - .0000	.0005 .0015	3.1875	3.1875		3.1850		5.1250	5.1250		5.1210	.0040	10.2500	10.2435	.0035
1.5625	1.5625		1.5610		3.2500	3.2500		3.2475		5.1875	5.1875		5.1835		10.5000	10.4935	.0065
1.6250	1.6250		1.6235		3.3125	3.3125		3.3100		5.2500	5.2500		5.2460		10.7500	10.7435	
1.6875	1.6875		1.6860		3.3750	3.3750		3.3725		5.3125	5.3125		5.3085		11.0000	10.9935	
1.7500	1.7500		1.7485		3.4375	3.4375		3.4350		5.3750	5.3750		5.3710		11.2500	11.2430	.0040
1.8125	1.8125		1.8110		3.5000	3.5000		3.4975		5.4375	5.4375		5.4335		11.5000	11.4930	.0070
1.8750	1.8750		1.8735		3.5625	3.5625		3.5600		5.5000	5.5000		5.4960		11.7500	11.7430	
1.9375	1.9375		1.9360		3.6250	3.6250		3.6225		5.5625	5.5625		5.5585		12.0000	11.9930	
2.0000	2.0000		1.9985		3.6875	3.6875		3.6850		5.6250	5.6250		5.6210		12.5000	12.4925	.0045
+ .0000 - .0010	+ .0015 - .0000	.0000 .0025	+ .0005 - .0000	.0005 .0015	3.7500	3.7500		3.7475		5.6875	5.6875		5.6835		13.0000	12.9925	.0075
2.0625	2.0625		2.0610		3.8125	3.8125		3.8100		5.7500	5.7500		5.7460		13.5000	13.4920	.0050
2.1250	2.1250		2.1235		3.8750	3.8750		3.8725		5.8125	5.8125		5.8085		14.0000	13.9920	.0080
2.1875	2.1875		2.1860		3.9375	3.9375		3.9350		5.8750	5.8750		5.8710		14.5000	14.4915	.0055
					4.0000	4.0000		3.9975		5.9375	5.9375		5.9335		15.0000	14.9915	.0085
										6.0000	6.0000		5.9960		+ .0000 - .001	+ .0025 - .0000	.0055 .0090
										6.2500	6.2500		6.2460		15.5000	15.4910	
										6.5000	6.5000		6.4960		16.0000	15.9910	
															16.5000	16.4905	.0060
															17.0000	16.9905	.0095

\* For shaft diameters larger than 17.000", use an average interference fit of .0005" per inch of shaft diameter within the following bore tolerances:  
 + .0025, - .0000 for over 17" to 20" dia. incl.  
 + .003, - .000 for over 20" to 30" dia. incl.  
 + .004, - .000 for over 30" to 40" dia. incl.  
 Tolerances and fits comply with, or are within, AGMA 9002 standard (Class 1 clearance fit).


**TABLE 10 — Recommended Keyways for Hubs with One Keyway — Inches**

Nominal Bore		Keyway Size ‡ Width x Depth	Width Tolerance †
Over	Thru		
.4375	.5625	.125 x .062	+ .0020 - .0000
.5625	.875	.1875 x .094	+ .0020 - .0000
.875	1.250	.250 x .125	+ .0020 - .0000
1.250	1.375	.3125 x .156	+ .0020 - .0000
1.375	1.750	.375 x .188	+ .0025 - .0000
1.750	2.250	.500 x .250	+ .0025 - .0000
2.250	2.750	.625 x .312	+ .0030 - .0000
2.750	3.250	.750 x .375	+ .0030 - .0000
3.250	3.750	.875 x .438	+ .0030 - .0000
3.750	4.500	1.000 x .500	+ .0030 - .0000
4.500	5.500	1.250 x .625	+ .0035 - .0000
5.500	6.500	1.500 x .750	+ .0035 - .0000
6.500	7.500	1.750 x .750	+ .0040 - .0000
7.500	9.000	2.000 x .750	+ .0040 - .0000
9.000	11.000	2.500 x .875	+ .0045 - .0000
11.000	13.000	3.000 x 1.000	+ .0045 - .0000
13.000	15.000	3.500 x 1.250	+ .0050 - .0000
15.000	18.000	4.000 x 1.500	+ .0050 - .0000

† One square key for bore diameters thru 6.500"; one rectangular key for bore diameters over 6.500".

‡ Depth tolerance: + .010" to + .020".

# Engineering Data

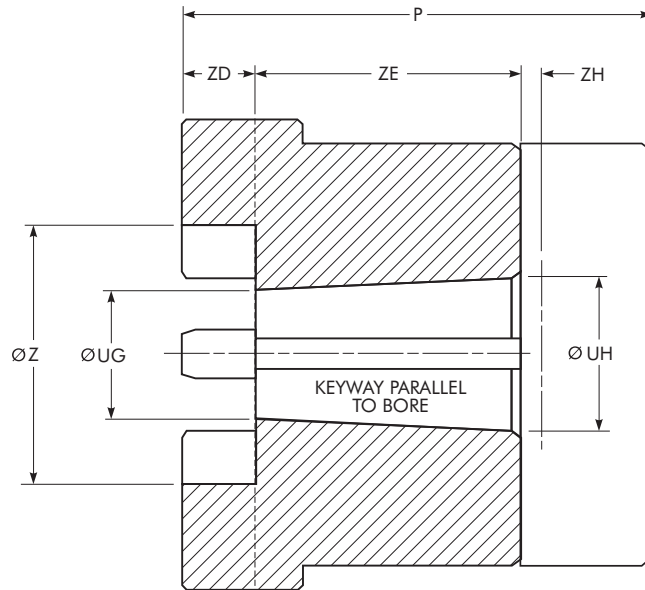

**TABLE 11 — Standard AISE AC & DC Mill Motor Coupling Selections**

Motor Frame Sizes			Coupling Size	Torque Rating (lb-in)	Ø UG	Ø UH	Ø Z	Keyway	ZD	ZE	ZH + .000 - .000
2, 602	802 A,B,C	AC 1, 2, 4	40R † 50R	9,100 22,200	1.438	1.750	3.181 4.173	.500 x .250 .500 x .250	0.83 1.10	3.00	.024
603, 604	803, 804	...	50R 60R	22,200 35,500	1.635	2.000	4.173 5.315	.500 x .250 .500 x .250	1.10 1.39	3.50	.029
606	806	AC 8, 12	50R † 60R 70R	22,200 35,550 70,900	2.083	2.500	4.173 5.315 6.299	.500 x .250 .500 x .250 .500 x .250	1.10 1.39 1.56	4.00	.029
608	808	...	60R 70R 80R	35,550 70,900 133,000	2.531	3.000	5.315 6.299 7.480	.750 x .250 .750 x .250 .750 x .250	1.39 1.56 1.79	4.50	.029
610	810	AC 18	70R 80R	70,900 133,000	2.781	3.250	6.299 7.480	.750 x .250 .750 x .250	1.56 1.79	4.50	.034
612	812	AC 25, 30	70R 80R	70,900 133,000	3.104	3.625	6.299 7.480	.750 x .250 .750 x .250	1.56 1.79	5.00	.034
614	814	AC 40, 50	80R	133,000	3.729	4.250	7.480	1.000 x .375	1.79	5.00	.034

† Must use "standard" socket on mill motor nut. "Impact" socket will not fit.

**TABLE 12 — Taper & Counter Bore Limitations**

Coupling Size	P Max	Ø UG Min	Ø UH Max	Ø Z Max	ZD Max	ZE Min	Keyway *
5R	2.40	.500	1.500	1.535	.362	.827	.375 x .188
10R	3.11	.500	1.750	1.811	.441	1.000	.375 x .188
20R	4.13	.750	2.250	2.311	.598	1.063	.500 x .250
30R	5.24	1.000	2.500	2.559	.677	1.339	.625 x .313
40R	6.10	1.125	3.125	3.181	.835	1.339	.750 x .375
50R	7.17	1.125	4.125	4.173	1.110	1.811	1.000 x .500
60R	7.29	1.250	5.250	5.315	1.394	2.126	1.250 x .625
70R	8.65	1.500	6.125	6.299	1.571	2.244	1.500 x .750
80R	10.06	1.500	7.250	7.480	1.795	2.618	1.750 x .875

\* Keyway shown is for maximum bore with square key.


**TABLE 13 — Type R10 Mill Motor Hubs**

Mill Motor Frame Size		R10 Flex Hubs								
		5R	10R	20R	30R	40R	50R	60R	70R	80R
602	802 A, B, C	AC 1, 2 & 4	...	...	...	...	X	X	...	...
603	803		...	...	...	...	Consult Falk	X	X	...
604	804		...	...	...	...	...	X	X	...
606	806	AC 8 & 12	...	...	...	...	...	X	X	...
608	808		...	...	...	...	...	...	X	X
610	810	AC 18	...	...	...	...	...	...	Consult Falk	X
612	812	AC 25 & 50	...	...	...	...	...	...	...	X
614	814	AC 40 & 50	...	...	...	...	...	...	...	X

# Engineering Data

**TABLE 14 — Installation & Operating Misalignment Capacity**

COUPLING SIZE	Installation Limits		Operating Limits	
	Parallel Offset (Inch)	Angular (Degree)	Parallel Offset (Inch)	Angular (Degree)
2R	.010	0.25	.020	1.00
3R	.010	0.25	.020	1.00
4R	.010	0.25	.020	1.00
5R	.020	0.25	.040	1.00
10R	.020	0.25	.040	1.00
20R	.040	0.25	.080	1.00
30R	.040	0.25	.080	1.00
40R	.040	0.25	.080	1.00
50R	.040	0.25	.080	1.00
60R	.040	0.25	.080	1.00
70R	.040	0.25	.080	1.00
80R	.040	0.25	.080	1.00

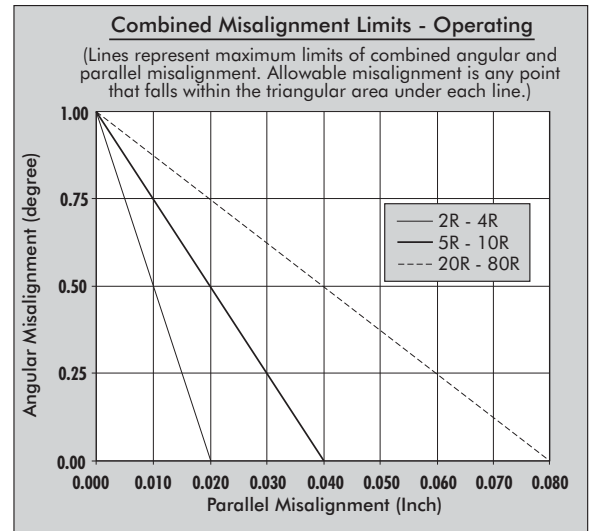

**TABLE 15 — Mass & WR<sup>2</sup>**

R10 Mass						
COUPLING SIZE	Element	Nylon Cover	Steel Cover	R10 Hub (No Bore)	Total w/Nylon Cover	Total w/Steel Cover
	lb	lb	lb	lb	lb	lb
2R	0.025	0.018	0.10	0.38	0.80	0.89
3R	0.045	0.027	0.15	0.81	1.69	1.82
4R	0.063	0.042	0.25	1.23	2.57	2.77
5R	0.070	0.068	0.38	1.41	2.96	3.27
10R	0.13	0.11	0.61	2.62	5.48	5.98
20R	0.41	0.28	1.29	5.84	12.4	13.4
30R	0.63	0.37	1.82	9.83	20.7	22.1
40R	1.30	0.86	3.13	17.7	37.6	39.8
50R	2.70	1.70	5.83	37.2	78.8	82.9
60R	4.08	...	7.29	67.1	...	146
70R	6.17	...	10.2	114	...	244
80R	10.2	...	14.6	170	...	365

R10 WR <sup>2</sup>						
COUPLING SIZE	Element	Nylon Cover	Steel Cover	R10 Hub (No Bore)	Total w/ Nylon Cover	Total w/ Steel Cover
	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>	lb-in <sup>2</sup>
2R	0.012	0.015	0.083	0.11	0.25	0.32
3R	0.036	0.036	0.20	0.41	0.89	1.06
4R	0.067	0.072	0.43	0.82	1.78	2.14
5R	0.090	0.14	0.76	1.05	2.33	2.95
10R	0.23	0.32	1.73	2.80	6.15	7.56
20R	1.35	1.57	7.02	10.5	23.9	29.4
30R	2.75	2.80	13.2	23.2	52.0	62.4
40R	8.84	10.1	35.3	65.6	150	175
50R	30.4	31.8	106	245	552	626
60R	67.8	...	188	621	...	1,498
70R	141	...	358	1,500	...	3,499
80R	334	...	740	2,950	...	6,974

R31/R35 WR <sup>2</sup> Values ★									
COUPLING SIZE	T31 Shaft Hub	R31 Assembly †				R35 Assembly ‡			
		Min BE (Inch)	WR <sup>2</sup> at Min BE (lb-in <sup>2</sup> )		WR <sup>2</sup> (lb-in <sup>2</sup> ) per Inch	Min BE (Inch)	WR <sup>2</sup> at Min BE (lb-in <sup>2</sup> )		WR <sup>2</sup> (lb-in <sup>2</sup> ) per Inch
			Nylon Cover	Steel Cover			Nylon Cover	Steel Cover	
5R	1020	3.19	7.53	8.15	0.351	1.99	4.93	5.55	0.351
10R	1030	3.50	13.6	15.0	0.413	2.35	9.61	11.0	0.413
20R	1040	3.50	39.1	44.8	1.253	3.01	33.0	38.4	1.253
30R	1050	4.38	72.4	82.3	1.980	3.45	65.9	75.8	1.980
40R	1070	5.00	217	243	4.164	3.49	184	209	4.164
50R	1080	6.50	579	654	10.78	4.45	565	640	10.78
60R	1090	7.87	...	1500	20.35	5.42	...	1500	20.35
70R	1100	8.80	...	2970	40.58	6.06	...	3230	40.58
70R	1110	8.80	...	3620	40.58	6.06	...	3550	40.58
80R	1120	9.78	...	7670	61.97	6.80	...	7210	61.97
80R	1130	10.00	...	9610	144.8	6.91	...	8190	144.8

★ WR<sup>2</sup> values are based on hubs with no bore.

† For R31 Mass, refer to Page 11.

‡ For R35 Mass, refer to Page 12.

# World Class Customer Service

For more than 100 years, the dedicated people of Rexnord have delivered excellence in quality and service to our customers around the globe. Rexnord is a trusted name when it comes to providing skillfully engineered products that improve productivity and efficiency for industrial applications worldwide. We are committed to exceeding customer expectations in every area of our business: product design, application engineering, operations, and customer service.

Because of our customer focus, we are able to thoroughly understand the needs of your business and have the resources available to work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment down time.

Rexnord represents the most comprehensive portfolio of power transmission and conveying components in the world with the brands you know and trust.

Rexnord and Wrapflex are registered trademarks of Rexnord Industries, LLC. Falk is a trademark of Rexnord. Taperlock is a trademark of a bushing under license. All rights reserved.

## WORLDWIDE CUSTOMER SERVICE

### AUSTRALIA

Rexnord Australia Pty. Ltd.  
Picton, New South Wales  
Phone: 61-2-4677-3811  
Fax: 61-2-4677-3812

### BRAZIL

Rexnord Correntes Ltda.  
Sao Leopoldo - RS  
Phone: 55-51-579-8022  
Fax: 55-51-579-8029

### CANADA

Rexnord Canada Ltd.  
Scarborough, Ontario  
Phone: 1-416-297-6868  
Fax: 1-416-297-6873

### CHINA

Rexnord China  
Shanghai, China  
Phone: 86-21-62701942  
Fax: 86-21-62701943

### EUROPE

Rexnord NV/SA  
Mechelen, Belgium  
Phone: 32-15-443811  
Fax: 32-15-443860

Rexnord Kette GmbH  
Betzdorf, Germany  
Phone: 49-2741-2840  
Fax: 49-2741-284-385

### LATIN AMERICA

Rexnord International, Inc.  
Milwaukee, Wisconsin  
Phone: 1-414-643-2366  
Fax: 1-414-643-3222  
E-mail: [international2@rexnord.com](mailto:international2@rexnord.com)

### MEXICO

Mecanica Falk S.A. de C.V.  
Mexico, D.F. 02300  
Phone: 52-55-9140-3500  
Fax: 52-55-9140-3550

### SINGAPORE

Rexnord International, Inc.  
Singapore City, Singapore  
Phone: 65-6338-5622  
Fax: 65-6338-5422

### UNITED STATES

Customer Service  
Phone: 1-866-REXNORD  
(1-866-739-6673)  
Fax: 1-614-675-1898  
E-mail: [rexnordcs\(state\)@rexnord.com](mailto:rexnordcs(state)@rexnord.com)  
Example: [rexnordcsohio@rexnord.com](mailto:rexnordcsohio@rexnord.com)

### ALL COUNTRIES NOT LISTED

Rexnord International  
Milwaukee, Wisconsin  
Phone: 1-414-643-2366  
Fax: 1-414-643-3222  
E-mail: [international1@rexnord.com](mailto:international1@rexnord.com)

